


Lecture 2:

Projectile motion

Euler and higher-order methods



Why do golf balls
have dimples?
Credit: Penn State.



Ballistic motion, Credit: wikipedia

Ballistic motion: Mathematical model & analytical solution

- ▶ Newtonian dynamics:

$$\frac{d^2x}{dt^2} = 0; \quad \frac{d^2y}{dt^2} = -g$$

$g \approx 9.8 \text{ m s}^{-2}$ is the acceleration due to gravity, x is horizontal distance travelled, y is height

- ▶ Analytical solution:

$$x = x_0 + \dot{x}_0 t; \quad y = y_0 + \dot{y}_0 t - \frac{g}{2} t^2 .$$

(x_0, y_0) is initial position, (\dot{x}_0, \dot{y}_0) is initial velocity in x and y direction

- ▶ In terms of launch angle, θ_0 , and launch speed, v_0 ,

$$\dot{x}_0 = v_0 \cos(\theta_0); \quad \dot{y}_0 = v_0 \sin(\theta_0) .$$

Ballistic motion: Mathematical model & analytical solution

- ▶ Exercise: show that for $\dot{y}_0 > 0$ assume $(x_0, y_0) = (0, 0)$ and a flat terrain:
 - ▶ maximum height is reached at time t_{\max}

$$t_{\max} = \frac{\dot{y}_0}{g}$$

- ▶ maximum distance travelled when $\theta_0 = \frac{\pi}{4}$
- ▶ Particle's energy, $E = \frac{1}{2}mv^2 + mgy$, is conserved

$$\dot{E} = m(v_x \dot{v}_x + v_y \dot{v}_y + g \dot{v}_y) = mv_y(\dot{v}_y + g) = 0, \text{ since } \dot{v}_x = 0 \text{ and } \dot{v}_y = -g$$

Good test for numerical solution!

Ballistic motion: Numerical solution

- ▶ **Euler's method** (see lecture on radioactive decay)

- ▶ Solution for differential equations of the type

$$\frac{d\mathbf{x}}{dt} = \mathbf{f}(\mathbf{x}, t).$$

- ▶ **Discretise** time t and coordinate x with time-step Δt :

$$\mathbf{x}(t^{n+1}) \equiv \mathbf{x}^{n+1} = \mathbf{x}^n + \mathbf{f}(\mathbf{x}^n, t^n)\Delta t.$$

- ▶ Euler method won't work directly **first order differential equations** only
- ▶ We will massage the equations!

Ballistic motion: Numerical solution

- ▶ Problem: Euler's method not directly applicable, because equations are second order
- ▶ Solution: use **velocities** as well (generally applicable)
 - ▶ Original second-order equation: $f_y = -g$ in previous slide

$$\frac{d^2y}{dt^2} = f_y$$

- ▶ Rewrite as two, first-order equations:

$$\frac{dy}{dt} = v_y; \quad \frac{dv_y}{dt} = f_y.$$

and similarly for x (and z , etc)

- ▶ Solve first-order equations using Euler's method

Ballistic problem: Numerical solution (cont'd)

- ▶ Mathematical model: $\frac{d^2x}{dt^2} = 0$; $\frac{d^2y}{dt^2} = -g$
- ▶ Initial conditions: Launch angle θ_0 , launch speed v_0 ,
 $(x_0, y_0) = (0, 0)$, $(v_{x,0}, v_{y,0}) = v_0(\cos(\theta_0), \sin(\theta_0))$
- ▶ Euler's method: $t = 0$: $(x^0, y^0) = (0, 0)$, $(v_x^0, v_y^0) = v_0(\cos(\theta_0), \sin(\theta_0))$

$$\begin{aligned}x(t^{n+1}) \equiv x^{n+1} &= x^n + v_x^n \Delta t; & v_x^{n+1} &= v_x^n + 0 \Delta t \\y(t^{n+1}) \equiv y^{n+1} &= y^n + v_y^n \Delta t; & v_y^{n+1} &= v_y^n - g \Delta t \\t^{n+1} &= t^n + \Delta t\end{aligned}$$

Exercise: does this conserve energy? Answer: NO!

Ballistic motion: Numerical solution (cont'd)

- ▶ As in previous lecture: need to choose Δt carefully
 - ▶ time-scale in this problem: $t_{\max} = \frac{v_{y,0}}{g}$ is time to reach maximum height
therefore take $\Delta t \ll t_{\max}$
 - ▶ the flight duration is $t_f = 2t_{\max} \rightarrow$ equivalently take $\Delta t \ll t_f$
- ▶ Analytical solution known: good test of implementation and choice of Δt

Air resistance: mathematical model

Projectile suffers from **air resistance**, which depends on speed. No known analytical solution.

- ▶ Drag force:

$$\mathbf{F}_{\text{drag}} = -B_{1,\text{drag}}v\frac{\mathbf{v}}{v} - B_{2,\text{drag}}v^2\frac{\mathbf{v}}{v} + \dots$$

- ▶ drag force is parallel to velocity, $\mathbf{F} \parallel \mathbf{v}$
 $\frac{\mathbf{v}}{v}$ is unit vector in the direction of motion
- ▶ drag coefficients $B_{1,\text{drag}} > 0$ and $B_{2,\text{drag}} > 0$ since drag *slows projectile down*

Air resistance: mathematical model (cont'd)

- ▶ Dimensional analysis: $|\mathbf{F}_{\text{drag}}|$ depends on density of air (ρ), speed (v) and size of projectile (r): $F_{\text{drag}} \propto \rho^\alpha v^\beta r^\gamma$

[A] means dimension of A

$$[F_{\text{drag}}] = \text{kg m s}^{-2} = [\rho]^\alpha [v]^\beta [r]^\gamma = (\text{kg m}^{-3})^\alpha (\text{m s}^{-1})^\beta \text{m}^\gamma$$
$$\rightarrow \alpha = 1; \quad \beta = 2; \quad \gamma = 2$$

- ▶ Therefore take

$$\mathbf{F}_{\text{drag}} \approx -B_{2,\text{drag}} v^2 \frac{\mathbf{v}}{v} = -B_{2,\text{drag}} v \begin{pmatrix} v_x \\ v_y \end{pmatrix},$$

where, of course, $v^2 = v_x^2 + v_y^2$, and $B_{2,\text{drag}} \propto \rho r^2$ depends on projectile's size and density of air

- ▶ Homework: $B_{2,\text{drag}} = B_{2,\text{drag}}(y) = B_{2,\text{drag}}(y=0) \frac{\rho(y)}{\rho(y=0)}$

Air resistance: Numerical solution

- ▶ **Mathematical model:** : m is mass of projectile, B is drag coefficient

$$\frac{d^2x}{dt^2} = -\frac{B(y)v v_x}{m}, \quad \frac{d^2y}{dt^2} = -g - \frac{B(y)v v_y}{m}$$

- ▶ **Euler's method:** $t = 0: (x^0, y^0) = (0, 0), (v_x^0, v_y^0) = v_0(\cos(\theta_0), \sin(\theta_0))$

$$x^{n+1} = x^n + v_x^n \Delta t; \quad v_x^{n+1} = v_x^n - \frac{B(y^n)v^n v_x^n}{m} \Delta t$$

$$y^{n+1} = y^n + v_y^n \Delta t; \quad v_y^{n+1} = v_y^n - g \Delta t - \frac{B(y^n)v^n v_y^n}{m} \Delta t$$

$$t^{n+1} = t^n + \Delta t$$

$$v^n = \left((v_x^n)^2 + (v_y^n)^2 \right)^{1/2}$$

taking $\Delta t \ll v_{y,0}/g$

Pseudo-code

Main program

- ▶ Initial conditions.
- ▶ Calculate the trajectory.
- ▶ Print/plot the result.
- ▶ Calculate range.

Initialisation

- ▶ Fix x_0, y_0, t_0 , fix/read in v_0, θ_0 (in degrees).

Calculation


- ▶ Iterate eqn's above, **stop when $y_i < 0$** , $n_{\text{end}} = n = i$.

Calculate range

- ▶ Range from interpolation between (x_n, y_n) and (x_{n-1}, y_{n-1}) :

$$x_{\text{range}} = \frac{y_n x_{n-1} - y_{n-1} x_n}{y_n - y_{n-1}}.$$

Results for trajectories

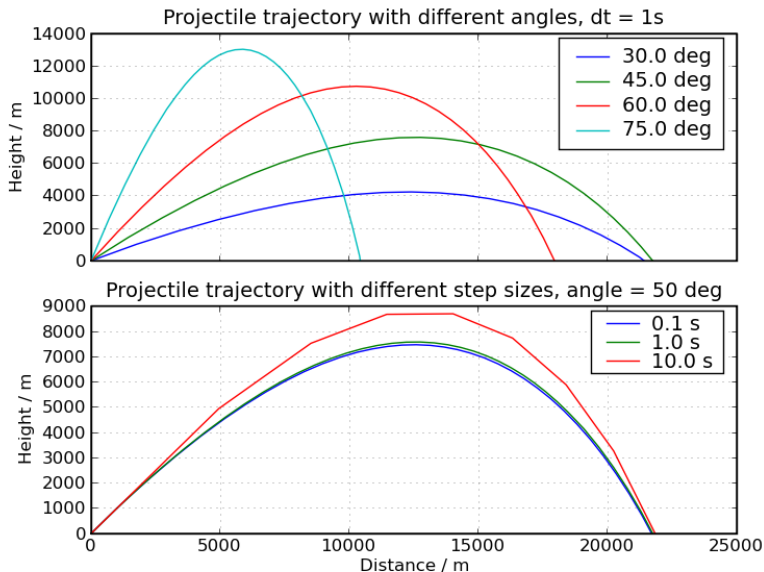

Higher-order methods Improving the Euler's method

- ▶ Euler method simple to implement, but correct only to $\mathcal{O}(\Delta t)$. Can we improve this?

- ▶ Yes, we can!

Remember origin of Euler's method: **Taylor expansion**

$$x(t + \Delta t) = x(t) + \frac{dx}{dt} \Delta t + \dots$$

According to the **mean value theorem**:

$$\exists t' \in [t, t + \Delta t] : x(t + \Delta t) \equiv x(t) + \left. \frac{dx}{dt} \right|_{t=t'} \Delta t$$

- ▶ Here t' includes higher order effects (curvature etc.).
Drawback: Not known generally, but maybe **better choices** than $t' = t$ employed in Euler method

Higher-order methods: 2nd order Runge-Kutta (RK2)

- ▶ Underlying idea: Estimate $t' = t + \Delta t/2$
- ▶ But: also need dx/dt at $t = t'$.
Estimate x' using the 'prediction'

$$x' = x + f(x, t) \frac{\Delta t}{2}.$$

- ▶ Second-order scheme (precision $\mathcal{O}[(\Delta t)^2]$):

$$\begin{aligned}x' &= x + f(x, t) \frac{\Delta t}{2} \\x(t + \Delta t) &= x(t) + f(x', t') \Delta t \\x^{n+1} &= x^n + f\left(x^n + \frac{\Delta t}{2} f(x^n, t^n), t^n + \frac{\Delta t}{2}\right) \Delta t\end{aligned}$$

$$t^{n+1} = t^n + \Delta t$$

Higher-order methods: 4th order Runge-Kutta (RK4)

- ▶ Further improvement: More sampling points


$$x(t + \Delta t) = \frac{\Delta t}{6} [f(x'_1, t'_1) + 2f(x'_2, t'_2) + 2f(x'_3, t'_3) + f(x'_4, t'_4)] .$$

- ▶ Sampling points given by

$$\begin{aligned} x'_1 &= x & t'_1 &= t \\ x'_2 &= x + f(x'_1, t'_1) \frac{\Delta t}{2} & t'_2 &= t + \frac{\Delta t}{2} \\ x'_3 &= x + f(x'_2, t'_2) \frac{\Delta t}{2} & t'_3 &= t + \frac{\Delta t}{2} \\ x'_4 &= x + f(x'_3, t'_3) \Delta t & t'_4 &= t + \Delta t . \end{aligned}$$

- ▶ Fourth-order scheme (precision $\mathcal{O}[(\Delta t)^4]$)

Euler vs. Runge-Kutta(s) for Radioactive Decays

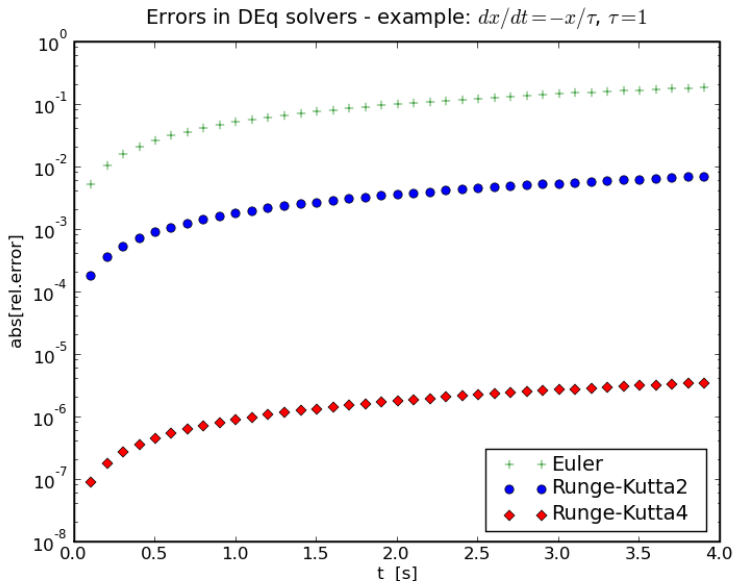

Integration of 2nd order DEs - some more considerations

- ▶ Consider what is needed Value at $t = t_{\text{end}}$? Or whole path?
- ▶ What is the accuracy required?
- ▶ Choice of Δt ? Should Δt itself vary? How?

How does that change the method/code?

- ▶ Higher-order methods 4th order RK especially popular in computational physics
 - ▶ higher-order does not imply *higher accuracy*
 - ▶ more evaluations per step

more computationally expensive unless step-size correspondingly larger

- ▶ Other methods exist e.g. predictor-corrector, see e.g. *Numerical Recipes*
- ▶ Method discussed here only works for **smooth functions** f

Summary

- ▶ Another example for numerical solutions of differential equations: trajectory of a particle
- ▶ Euler's method not directly applicable due to presence of 2nd order

derivatives

Solution: Use velocities:

one 2nd-order DE → two 1st-order DEs generally applicable

- ▶ This allows to use the Euler method (again).
- ▶ Improvement of the Euler method possible, higher-order methods: e.g. Runge-Kutta methods
better accuracy for same step-size but more computations per step

Further physics extensions to projectile motion

- ▶ Value of drag coefficient depends on velocity

underlying physics changes from laminar airflow at low speed to turbulent flow at high speed

important aspect in describing the flight of a baseball!

- ▶ properties of the surface of the projectile matter

airflow, and hence drag force, depends significantly on smoothness of projectile's surface

- ▶ spin: making ball spin can dramatically affect flight path

e.g. golf: strong back-spin dramatically increases range

spin can make trajectory curved - e.g. football or tennis

Exercise: use dimensional analysis to guess form of force to add